


PROVAC 3 DIESEL UNIT



Vacuum Technology

DIMENSIONAL SPECIFICATIONS

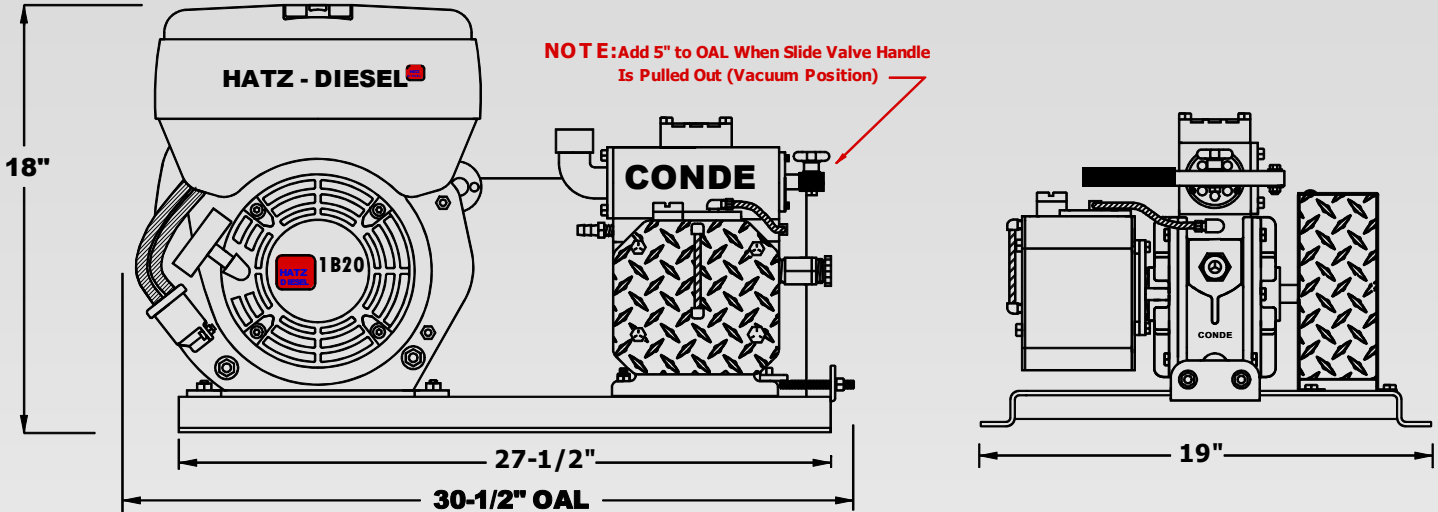

TECHNICAL SPECIFICATIONS

Part No.	OLUN03PV04DI	HDUN03PV04DI
CFM, Free Air	35	70
CFM, 15" Hg	17	35
Hatz 1B20 Diesel	Electric Start	Electric Start
Horsepower	4.6 @ 3600 RPM	4.6 @ 3600 RPM
Vacuum/Pressure	No	Yes
Vacuum Only	Yes	No
Max. Vacuum	27" HG	27" HG
Max. Pressure *	15 PSIG	15 PSIG
Oiler	Automatic	Automatic
Weight	175 LBS	180 LBS

* Conde Pumps recommends that pressures on tank systems do not exceed 10 PSIG. A Pressure Relief Valve is required set @ 5 to 10 PSIG. On HD models equipped with pressure vent, tank pressure will relieve when unit is shut off.

PERFORMANCE SPECIFICATIONS

TANK PULL DOWN TIME TO 15" HG

TANK SIZE	PROVAC UNIT
100 GALLON	20 SECONDS
150 GALLON	30 SECONDS
200 GALLON	40 SECONDS
300 GALLON	50 SECONDS

WESTMOOR LTD.
906 WEST HAMILTON AVE
SHERRILL, NY 13461



PHONE: 800-367-0972

WEB: WWW.WESTMOORLTD.COM

FAX: 315-363-0193