

# Westmoor Ltd.



**Vacuum Technology**



Conde Pump Assembly circa 1940



Conde Pumps Today



## ***Celebrating over 70 years of manufacturing USA made Conde Pumps.***

The Conde Pump story goes back to 1939 in Central New York State. Lyall Conde began mass producing the Conde Pump line way back then for the dairy and other industrial applications. Mr. Conde knew then, that his pumps needed to perform and be reliable. His customer's livelihoods depended on it. We know that is just as true today as it was seventy years ago. You see, we still design and manufacture all of our products right here in Sherrill, New York, and, therefore, have total control over all aspects of manufacturing, testing, and quality control. We also know how to help our valued customers, because we make what we sell and know our products inside and out. It's as simple as that.

*We welcome you to come visit our factory to see for yourself how quality equipment is manufactured.*

### **Table Of Contents**

Page	
3-4	Vacuum Pumps
5	Pump Drive Systems
6-7	Gas Driven Pump Units
8	Diesel Driven Pump Units
9	Pump Oilers
10-11	ProVac Portable Pumping Station
12	ProChock Hold-Down System
13	Quick Reference Guide to Accessories
14-17	Pump Accessories and Parts
18	Build Your Own Tank Kits



Today's high production computer controlled equipment is fast and accurate.

## **Westmoor Ltd.**


**P.O. Box 99 • 906 West Hamilton Ave.  
Sherrill, NY 13461  
USA**

**TOLL FREE 800-367-0972**

**or 315-363-1500 FAX 315-363-0193**

**EMAIL [pumps@westmoorltd.com](mailto:pumps@westmoorltd.com)**



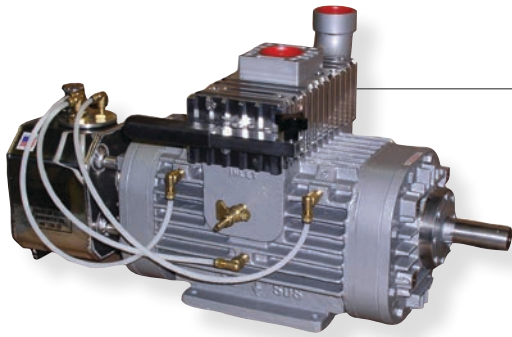


### SDS ULTRA • 230 CFM

SDS Ultra Vac/Press w/Oiler

*Ideal for tanks from  
1200 - 2500 gallons*

Part no.	Description
HD12ULTCC91	CCW Rotation
HD12ULTCW91	CW Rotation

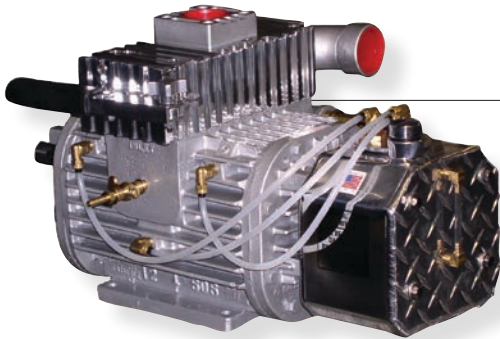


### SDS 12 • 180 CFM

SDS 12 Vac/Press w/Oiler

*Ideal for tanks from  
1000 - 2000 gallons*

Part no.	Description
HD12SDSCC91	CCW Rotation
HD12SDSCW91	CW Rotation

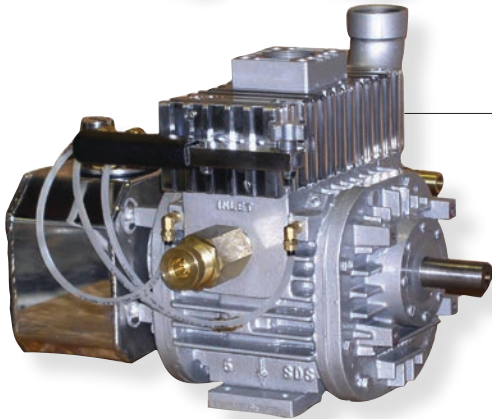


### SDS 6 • 115 CFM

SDS 6 Vac/Press w/Oiler

*Ideal for tanks from  
500 - 1000 gallons*

Part no.	Description
HD06SDSCC91	CCW Rotation
HD06SDSCW91	CW Rotation

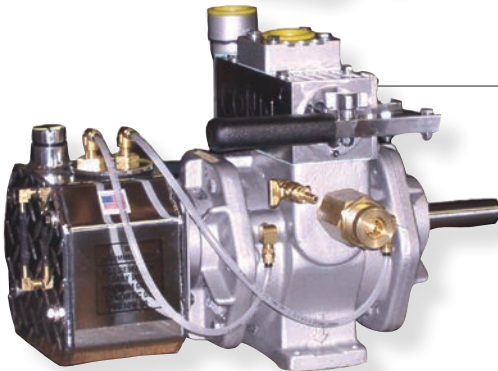


### SUPER 6 • 70 CFM

Super 6 Vac/Press w/Oiler

*Ideal for tanks from  
300 - 500 gallons*

Part no.	Description
HD06SSCC91	CCW Rotation
HD06SSCW91	CW Rotation

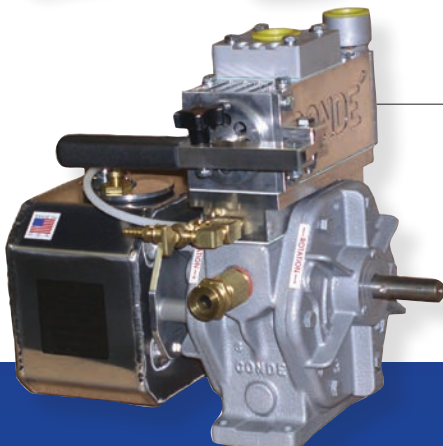

### PROVAC 3 • 35 CFM

ProVac 3 Vac/Press w/Oiler

*Ideal for tanks from  
50 - 300 gallons*

Part no.	Description
HD03PVCC91	CCW Rotation
HD03PVCW91	CW Rotation



Conde HD Vacuum/Pressure Pumps are built in a variety of sizes from 35 to 230 CFM for vacuum tanks from 50 to 2500 gallons. All Conde HD pumps incorporate the unique Conde Slide Valve change-over valve which is compact, low profile and always works easily. Conde automatic oilers never need adjustment. All pumps can be driven by a variety of power sources including gas engines, PTO, Right Angle Drive, or hydraulic pump. All pumps are double shafted and can easily be set up for either CW or CCW rotation. Sealed bearings require no maintenance. SDS 6, Super 6, and ProVac 3 pumps even include built-in vacuum relief valve!

## CONDE HD VAC/PRESS PUMPS

Speed Range	1200 - 1750 RPM	All Models
Maximum Vacuum	28" Hg Intermittent	All Models
Lubrication	Conde Automatic	All Models
Maximum Pressure	20 PSIG	All Models

	Port Size	Shaft Size	Weight
SDS Ultra	1-1/2"	1-1/8"	170 Lbs.
SDS 12	1-1/2"	1-1/8"	165 Lbs.
SDS 6	1-1/2"	1"	115 Lbs.
Super 6	1-1/4"	1"	90 Lbs.
ProVac 3	1"	3/4"	50 Lbs.



Conde Vacuum Only pumps are available in a wide range of sizes from 20 to 230 CFM. Conde vacuum only pumps offer a great economical alternative for those who do not require pressure off-loading on their pumps. Can be driven from a variety of power sources. Automatic oiling system requires no adjustment or maintenance. End thrust protection is standard on all Conde pumps as well as maintenance free sealed bearings.

**DID YOU KNOW?** All Conde pumps are bench tested for at least forty minutes under operating vacuum before they ever leave our plant.

# CONDE VACUUM ONLY PUMPS

Speed Range	1200 - 1750 RPM	All Models
Maximum Vacuum	28" Hg Intermittent	All Models
Lubrication	Conde Automatic	All Models


	Port Size	Shaft Size	Weight
SDS Ultra	1-1/2"	1-1/8"	160 Lbs.
SDS 12	1-1/2"	1-1/8"	150 Lbs.
SDS 6	1-1/2"	1"	100 Lbs.
Super 6	1-1/4"	1"	80 Lbs.
ProVac 3	1"	3/4"	40 Lbs.

## SDS ULTRA • 230 CFM

SDS Ultra Vacuum Only w/Oiler

*Ideal for tanks from  
1200 - 2500 gallons*

Part no.	Description
<b>OL12ULTCC91</b>	CCW Rotation
<b>OL12ULTCW91</b>	CW Rotation

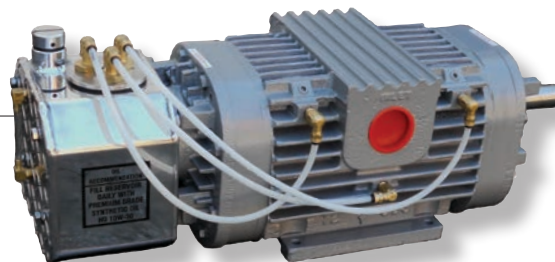


## SDS 12 • 180 CFM

SDS 12 Vacuum Only w/Oiler

*Ideal for tanks from  
1000 - 2000 gallons*

Part no.	Description
<b>OL12SDSCC91</b>	CCW Rotation
<b>OL12SDSCW91</b>	CW Rotation

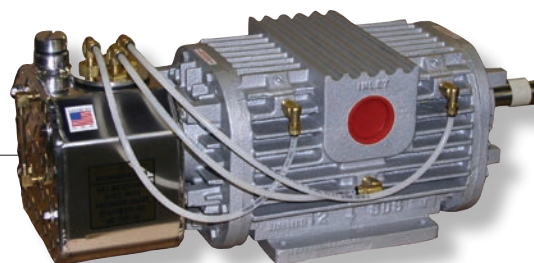


## SDS 6 • 115 CFM

SDS 6 Vacuum Only w/Oiler

*Ideal for tanks from  
500 - 1000 gallons*

Part no.	Description
<b>OL06SDSCC91</b>	CCW Rotation
<b>OL06SDSCW91</b>	CW Rotation

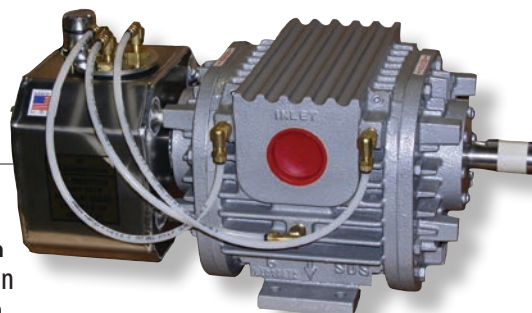


## SUPER 6 • 70 CFM

Super 6 Vacuum Only w/Oiler

*Ideal for tanks from  
300 - 500 gallons*

Part no.	Description
<b>OL06SSCC91</b>	CCW Rotation
<b>OL06SSCW91</b>	CW Rotation

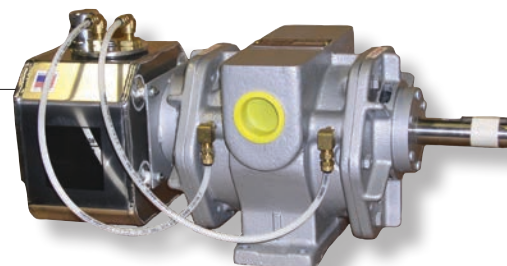


## PROVAC 3 • 35 CFM

ProVac 3 Vac Only w/Oiler

*Ideal for tanks from  
50 - 300 gallons*


Part no.	Description
<b>OL03PVCC91</b>	CCW Rotation
<b>OL03PVCW91</b>	CW Rotation

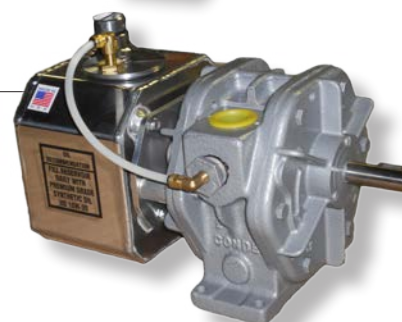

## Conde Clutch Driven

Conde Clutch Driven pumps are equipped with a tapered shaft for installation with an electric clutch.


<b>OL06CWTI</b>	Model 6 with clutch plate
<b>OL06SSCWTI</b>	Super 6 with clutch plate








# PUMP DRIVE SYSTEMS

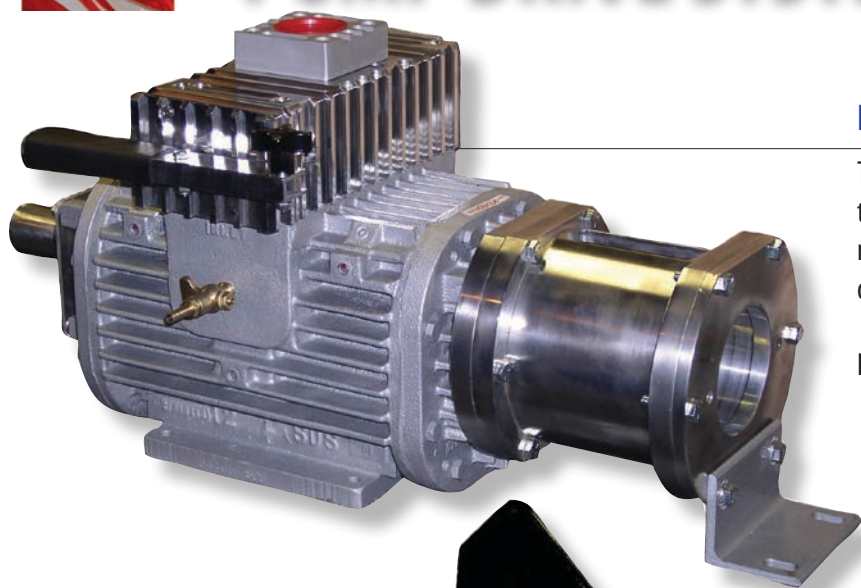

## Hydraulic Drive Bracket

The Conde Hydraulic Drive Bracket is a CNC machined bracket that allows for perfect alignment of the pump and hydraulic motor. Connect vacuum pump to hydraulic pump with direct drive coupling. For SDS 12 and SDS 6 pumps with special machined end plate.

**HDSDS12BR** SDS Hydraulic Bracket

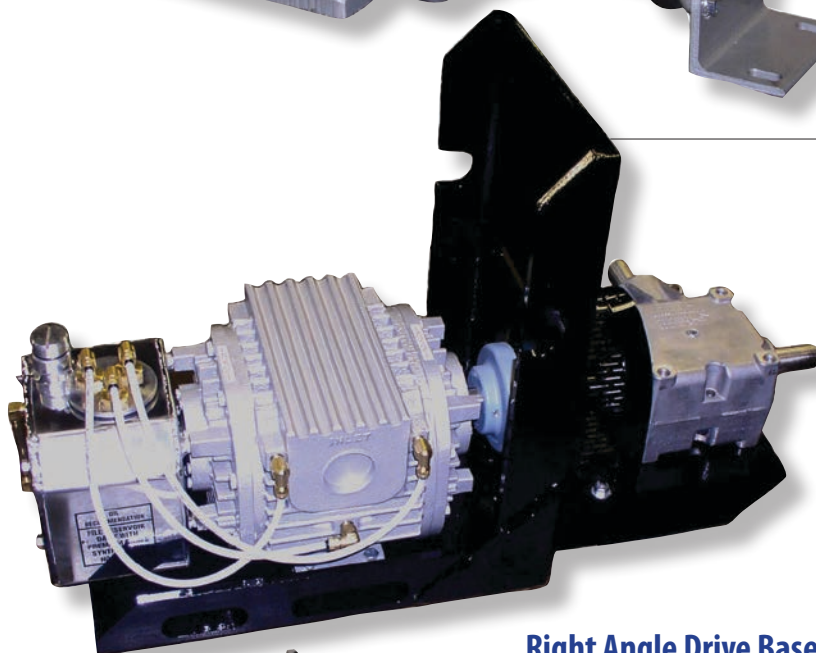

## Conde Right Angle PTO Drive

Complete Right Angle Drive system includes sturdy base, right angle gear box, direct drive coupling, mounted with the SDS pump of your choice. Easy bolt on installation to truck frame. Can accommodate either vacuum/pressure or vacuum only SDS pumps. Order both the right angle drive part No. below, and the pump of your choice.

**LWRADR** Right Angle Drive, SDS 6, SDS 12, SDS Ultra

## Right Angle Drive Base

Conde Right Angle Drive Base is CNC machined for extra strength. Painted with Amerlock for ultimate protection. Right angle drive guard included.

**LWRDRIVE** Right Angle Base, SDS 6, SDS 12, SDS Ultra



## Direct Drive Coupling

**PUCFL7J1**

1" Flange

**PUCFL7J118**

1-1/8" Flange

**PUCSL7JS**

Rubber Insert



## Superior RA Drive

Superior right angle drives are the standard of the industry.

**LWRADRGB 200 Series**



Conde PowerPaks are state of the art preassembled gasoline powered vacuum pump units. Easy to install; simply bolt down and attach to your tank. Diamond plate trim and belt guard insure that your unit looks as good as your rig. Rigid assembly insures minimum vibration and maximum power. Conde PowerPaks are available with either vacuum/pressure HD pumps, or economical vacuum only pumps. Our wide range of CFM sizes insure you will get the right vacuum pump unit for your size tank and application. Because these units are so easy to install, they can be transferred with ease to another tank system when needed. All units are powered with Honda GX Commercial Series engines. SDS Ultra unit is powered with the Briggs Vanguard Twin.


# BELT DRIVE POWERPAKS



**SDS Ultra PowerPak**  
*Ideal for tank sizes  
1200-2500 gallons*



**SDS 12 PowerPak**  
*Ideal for tank sizes  
1000-2000 gallons*

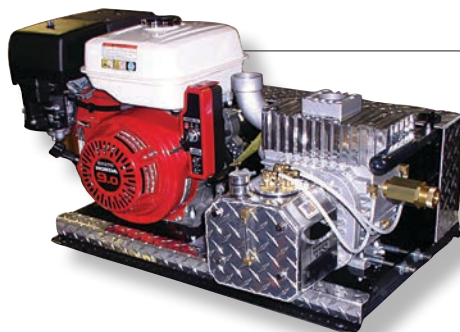

**SDS 6 PowerPak**  
*Ideal for tank sizes  
500 to 1000 gallons*



**Super 6 PowerPak**  
*Ideal for tank sizes  
300 to 500 gallons*



**ProVac 3 PowerPak**  
*Ideal for tank sizes  
50 to 300 gallons*

**Estimated Tank Pull Down Time (15" Hg)**

	SDS Ultra	SDS 12	SDS 6	Super 6	ProVac 3
100 gallon tank				8 sec.	16 sec.
200 gallon tank				17 sec.	37 sec.
300 gallon tank				25 sec.	50 sec.
400 gallon tank				34 sec.	64 sec.
500 gallon tank		16 sec.	26 sec.	52 sec.	84 sec.
750 gallon tank		24 sec.	40 sec.		
1000 gallon tank	25 sec.	32 sec.	53 sec.		
1500 gallon tank	39 sec.	50 sec.	80 sec.		
2000 gallon tank	52 sec.	67 sec.	106 sec.		
2500 gallon tank	65 sec.				



# DIRECT DRIVE POWERPAKS



Same performance as our belt- drive units. Direct drive units include centrifugal clutches which allows no-load starting. Engine can idle without vacuum or water pump for longer engine life.




## SDS 6HD Direct Drive

*Ideal for tank sizes  
500- 1000 gallons*



## Super 6 HD Direct Drive

*Ideal for tank sizes  
300 - 500 gallons*

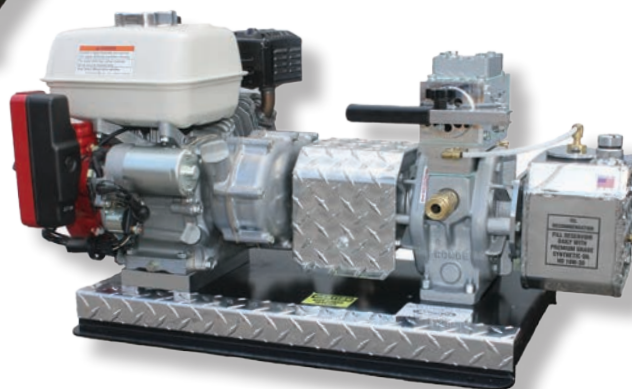

## ProVac 3 Direct Drive

*Ideal for tank sizes  
50 - 300 gallons*

### BELT DRIVE UNITS


Part No.	Description
HDUN06SDSULT18	SDS Ultra Vac/Press w/18 hp Briggs
OLUNSDSULT18	SDS Ultra Vac Only w/18 hp Briggs
HDUN12SDS13E	SDS 12 Vac/Press w/13 hp Honda
OLUN12SDS13E	SDS 12 Vac Only w/13 hp Honda
HDUN06SDS09E	SDS 6 Vac/Press w/9 hp Honda
OLUN06SDS09E	SDS 6 Vacuum Only w/9 hp Honda
HDUN06SS05ES	Super 6 Vac/Press w/5.5 hp Honda
OLUN06SS05ES	Super 6 Vacuum Only w/5.5 hp Honda
HDUN03PV05ES	ProVac 3 Vac/Press w/5.5 hp Honda
OLUN03PV05ES	ProVac 3 Vacuum Only w/5.5 hp Honda

### DIRECT DRIVE UNITS

Part No.	Description
HDUN06SDS9DD	SDS 6 Vac/Press w/9hp Honda
OLUN06SDS9DD	SDS 6 Vac only w/9hp Honda
HDUN06SS5DD	Super 6 Vac/Press w/ 5.5hp Honda
OLUN06SS5DD	Super 6 Vac Only w/ 5.5hp Honda
HDUN03PV5DD	ProVac 3 Vac/Press w/ 5.5 hp Honda
OLUN03PV5DD	ProVac 3 Vac Only w/5.5hp Honda

*All units Equipped with Electric Start Engines*

# DIESEL POWERED VACUUM PUMP UNITS

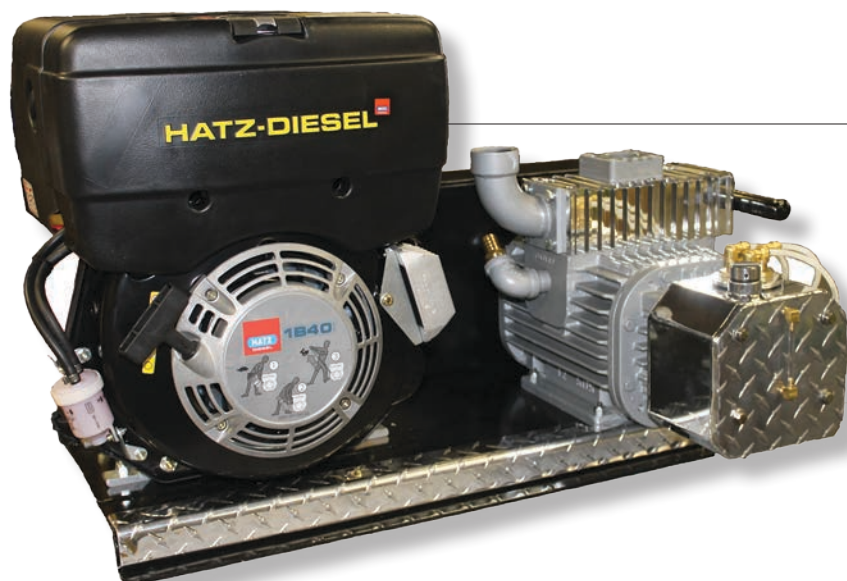

**Shown: SDS 12 Vacuum Only  
10 hp Diesel Unit**

**Shown: Super 6 Vac/Press  
6 hp Diesel Unit**



Conde Diesel Powered Vacuum Pump Units are ideal for applications where sparking is not permitted or diesel power is simply preferred. We use only quality Diesel air cooled engines on our units. Available in 6hp and 10 hp sizes with electric start.

<b>OLUN03PV06DI</b>	ProVac 3, vacuum only with 6 hp Diesel, Electric Start	35 CFM
<b>HDUN03PV06DI</b>	ProVac 3, Vac/Press with 6 hp Diesel, Electric Start	35 CFM
<b>OLUN06SS06DI</b>	Super 6, vacuum only with 6 hp Diesel, Electric Start	70 CFM
<b>HDUN06SS06DI</b>	Super 6, Vac/Press with 6 hp Diesel, Electric Start	70 CFM
<b>OLUN06SDS10DI</b>	SDS 6, vacuum only, 10 hp Diesel, Electric Start	115 CFM
<b>HDUN06SDS10DI</b>	SDS 6, Vac/Press, 10 hp Diesel, Electric Start	115 CFM
<b>OLUN12SDS10DI</b>	SDS 12, vacuum only with 10 hp Diesel, Electric Start	180 CFM
<b>HDUN12SDS10DI</b>	SDS 12, Vac/Press with 10 hp Diesel, Electric Start	180 CFM





# CONDE PUMP OILERS



## Aluminum Shaft Mount Oiler


Mounts on to shaft of the pump and can be set up on either end of pump for CW or CCW rotation.

**T00612SDS** For SDS 6, SDS 12 and Super 6

## Model 6 Oiler

Pump mount oiler for the Model 6 pump with two wick oilers

**T006PM**



## Large Capacity Remote Oiler

Oiler can be installed in a convenient location for easy maintenance.


Can be used with the Super 6, SDS 6, SDS 12 or SDS Ultra. Super pumps use twin oiler top, SDS triple.

**T00612SDSR**

## Model 3 Oiler

Pump mount oiler for the Model 3 pump with wick oiler.

**T003PM**

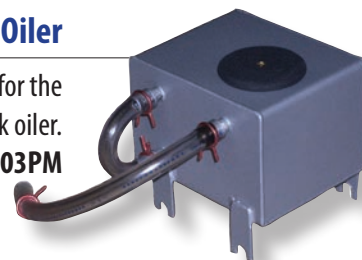

## Shaft Mount Super 6 Oiler


Compact design mounts to pump end plate and can be used for either CW or CCW rotation. Ideal when space is a concern.

**T006EM**

## Firewall Oiler

For use with Super 6 under the hood pumps.

**T006FMS**



# REPLACEMENT PARTS



## Aluminum Oil Fill Plug

**EDMP02A**

## Aluminum Oiler Top

**TOTOP6S - Super**

**TOTOP6R - Super Remote**

**TOTOP612SDS - SDS**

**TOTOP612SDS - SDS Remote**

**TOTOP03PV - ProVac 3**



## Rubber Oiler Plug

**T0002**

## Oiler Wicks for steel oilers

**T0004A**





# PERFORMANCE & IM

## WE LISTEN AND RESPOND

Years of positive customer feedback ;  
The ProVac Unit has evolved into the  
***best industrial pumpout***  
on the market today!

### STANDARD FEATURES

- Constructed of lightweight aluminum
- Conde ProVac Pump (35 CFM)
- Motor (13.4 AMP) works on any 15 AMP service
- User friendly/easy access front controls
- 24" wide fits through any standard door
- 45" height fits through cargo van door
- Hand/parking brake
- Exhaust deodorizer
- 25' retractable cord reel
- Hose rack and tool holder
- 2" x 10' plastiflex suction hose with wand
- 6" cleanouts, top and bottom
- Heavy duty wheels and front casters
- 120 gallon per minute pumping



### TECHNICAL SPECIFICATIONS

DIMENSIONS 24"WD X 50" LGTH X 45" HT  
WEIGHT ALUMINUM 250 LBS  
FINISH SATIN

### PART NO.

LWUNP60A10

MOTOR 1.5HP, 110V, 13.4 FLA  
PUMP CONDE PROVAC 3, 35 CFM  
OPERATING VACUUM 16" Hg  
OPERATING PRESSURE 5 PSI

PULL DOWN TIME 12 SECONDS  
INTAKE FLOW RATE 120 GALLONS PER MIN  
NOISE LEVEL 69dBA @ 10FT  
TANK VOLUME@SHUT OFF - 52 GALLONS



# AGE ARE EVERYTHING



## RUGGED AND RELIABLE MADE IN THE U.S.A.

The Conde ProVac Unit is an industrial liquid waste pumping system that is ideal for grease trap pumping. The ProVac is extremely quiet and pumps at an incredible 120 gallons per minute. A simple flip of the switch starts the ProVac in the vacuum mode for pumping. Built in exhaust deodorizer keeps odor at a minimum. Simply flip the switch to the pressure mode for off loading.

The Conde ProVac Industrial Pumpout Station is an intelligent pumping solution for locations not suitable for large vacuum truck hoses. Ideal for the indoor/remote tough-to-get-to jobs. Easy to maneuver, easy to use, easy to maintain and built to last.

*The Conde ProVac industrial pumpout station  
is a **PROFESSIONAL MACHINE** that pays for itself  
over and over again!*



**Westmoor Ltd.**  
MANUFACTURERS OF



**Vacuum Technology**  
Est.1939



# PRO-CHOCK

THE INCREDIBLY EASY AND EFFICIENT WAY  
TO TRANSPORT YOUR PROVAC



When every second of your day counts!

Safely secures our Conde ProVac on your trailer, pickup truck bed, lift gate, etc.

Simply engage four spring pins and tighten two knobs to hold in place.

Ruggedly built, tubular steel frame mounted on a galvanized steel plate.

Easy to install with four through bolts.

Works with new and older models.



# QUICK GUIDE TO RECOMMENDED PUMP COMPONENTS



For Conde Pumps	ProVac 3	Super 6	SDS 6	SDS 12	SDS Ultra
Airflow of pump @ 0" Hg	35	70	115	180	230
Primary Shut-Off (Alum.)	LWTRPV3A	LWTRP01	LWTRP01	LWTRP01	LWTRP01
Primary Shut-Off (Stainless)	LWTRPV3SS	LWTRP03	LWTRP03	LWTRP03	LWTRP03
Primary Shut-Off (Steel)	LWTRPV3	LWTRP02	LWTRP02	LWTRP02	LWTRP02
Secondary Moisture Trap	LWTR02	LWTRM01SS	LWTRM01SS	LWTRM01SS	LWTRM01SS
Oil Catch Muffler	MFOC3	MFOC3612	MFOC3612	MFOC3612	MFOC3612
Final Filter	LWTRPF1	LWTRPF150	LWTRPF150	LWTRPF150	LWTRPF150
Protection Package	LWPKG2	LWPKG1	LWPKG1	LWPKG1	LWPKG1
Flush Kit	KITFLUSH	KITFLUSH	KITFLUSH	KITFLUSH	KITFLUSH
Vacuum Relief Valve	RVP10	RVP13	RVP13	RVV03	RVV03
Pressure Relief Valve	RVP10P	RVP13P	RVP13P	RVP13P	RVP13P
Vacuum Gauge Liq. Filled	GAGE010	GAGE010	GAGE010	GAGE010	GAGE010
Vac/Press Gauge Liq. Filled	GAGE012	GAGE012	GAGE012	GAGE012	GAGE012
Swing Check Valve	PFCV075	PFCV125	PFCV150	PFCV150	PFCV150
Remote Slide Valve	SVAL061	SVAL06114	SVAL0115	SVAL0115	SVAL0115
Gas Unit Belt	BLTAX38	BLTBX48	BLTBX45	BLTBX48 (2)	BLTVB3 (3)
Gas Unit Pump Pulley	PULAK7434	PULBK801	PULBK801	PUL2BK80118	PUL3-3V/PUBSHX1
Gas Unit Motor Pulley	PULAK3934	PULBK3434	PULBK341	PUL2BK341	PUL3-3V3/PUBSHX1
Right Angle Gearbox Flange			PUCFL7J1	PUCFL7J1	PUCFL7J1
Right Angle Pump Flange			PUCFL7J1	PUCFL7J118	PUCFL7J118





# PUMP ACCESSORIES & PARTS

## Oil Catch Muffler

The Conde Oil Catch Muffler is designed to capture oil as it exits the pump as well as muffle the pump exhaust. Large capacity diamond plate oil catch will handle pumps up to 250 cfm including the Super 6, SDS 6, SDS 12, and SDS Ultra pumps. 1-1/2" connections.

The Model 3 oil catch is designed for the Model 3 and ProVac 3 pumps. 1" connections for pumps up to 40 cfm



**MF0C3612**  
Aluminum Oil Catch



**MF0C3**  
Model 3 Oil Catch

## Secondary Moisture Traps • ALL STAINLESS STEEL COMPONENTS

Designed to remove moisture and debris that can get by the primary shut-off. Large capacity trap is made completely of stainless steel, will never rot, and will keep it's good looks indefinitely. 1-1/2" connections. Good for pumps up to 250 CFM including Conde Super & SDS pumps.



**LWTRM01SS**  
Stainless Steel Moisture Trap

## Primary Vacuum Shut-Off


### STAINLESS STEEL CAGE WILL NOT CORRODE

Designed to shut vacuum off to the vacuum pump when the tank is full, preventing moisture and debris from entering the vacuum pump. Large primary is designed for pumps up to 250 CFM including the Super and SDS pumps. Available in carbon steel, aluminum, or stainless steel. Simply cut a hole in the top of the tank, and install into 6" opening.

- LWTRP01** Aluminum Primary Shut-Off
- LWTRP02** Steel Primary Shut-Off
- LWTRP03** Stainless Steel Primary Shut-Off



**ALUMINUM**

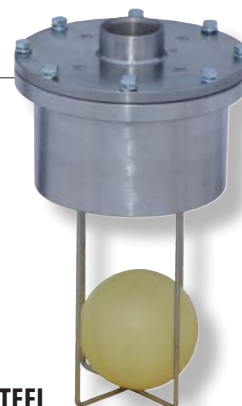

**STEEL**

## Small Plastic Secondary Trap

Small plastic secondary is ideal for systems up to 40 cfm. Ideal for the Conde Model 3, Model 6 and ProVac 3 pumps.



**LWTR02**  
Plastic Secondary Trap





# PUMP ACCESSORIES & PARTS

## Small Primary Shut-Off


Perfect Primary Shut-Off for smaller systems up to 40 CFM. Two Ball System offers excellent protection. Weld into 4" opening.



**LWTRPV3**  
Small Steel Primary

## Mini Primary Shut-Off

For small systems where larger openings are not an option. Shut-off screws into a 3" NPT coupling welded onto the tank. Uses 2" Float Ball. For systems up to 35 CFM.

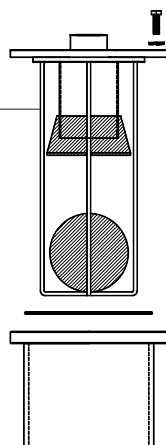

**LWTR31**  
Mini Steel Primary

## Final Filter • ALL STAINLESS STEEL

Especially in higher CFM pumps, debris and liquid can become airborne and pass by the primary and secondary traps and can build up inside the pump causing premature failure or vane sticking. The Final Filter is designed to catch debris before it enters the pump. Made entirely of stainless steel and will therefore not add to the problem by rotting. Filter element is easy to change and also made of stainless steel for durability.




**LWTRPF150**  
Stainless Steel Final Filter,  
1-1/2", up to 250 CFM



**LWTRPF02**  
Plastic Final Filter, 1", up to 35 CFM

## Conde Remote Slide Valve

The Conde Remote Slide Valve is an easy way to turn any vacuum only pump setup into a vacuum/pressure system. Simply mount the Remote Slide Valve in a convenient location and run a hose from the vacuum port of the pump to the bottom (brass check valve), and a hose from the exhaust port of the pump to the other bottom fitting. Side port goes to the oil catch muffler, and the top port of the Slide Valve connects to the tank.

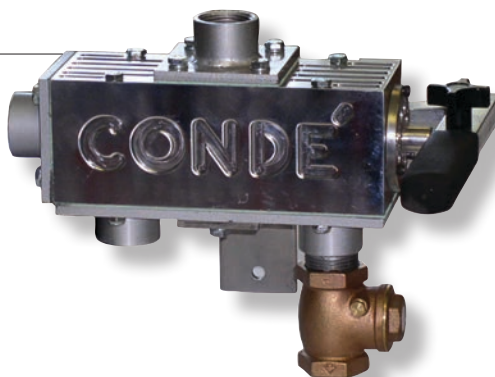

**SVAL061** 1" Remote  
**SVAL06114** 1-1/4" Remote  
**SVAL0115** 1-1/2" Remote



## Complete Protection Package 1

Get everything you need to protect your pump; Primary Vacuum Shut-Off, Secondary Moisture Trap, Final Filter, Oil Catch Muffler and SAVE MONEY.

**LWPKG1** Protection Package for  
Super 6, SDS 6, SDS 12, SDS Ultra  
up to 250 CFM pumps



## Complete Protection Package 2

Economic Protection package for the  
ProVac 3 pump and pumps to 40 CFM.

**LWPKG2** Protection Package for ProVac 3,  
up to 40 CFM

## Relief Valves



Vacuum Relief Valves are available in three sizes, 3/4", 1", and 1-1/2". 3/4" is right for the ProVac 3 pump and pumps to 40 cfm. The 1" size is right for the Super 6 and SDS 6 and pumps to 115 CFM. The 1-1/2" size is correct for the SDS 12, SDS Ultra and pumps to 250 CFM. The 3/4" and 1" valves can also be set up as pressure relief valves.

<b>RVP10</b>	3/4" Vac. Relief	<b>RVP13P</b>	1" Press. Relief
<b>RVP10P</b>	3/4" Press. Relief	<b>RVV03</b>	1-1/2" Vac. Relief
<b>RVP13</b>	1" Vac. Relief		

## Flush Kit


One of the best ways to protect your pump and prolong it's life is to flush it with kerosene or diesel fuel periodically. The Conde Flush Kit makes this task easy. Made of durable aluminum, simply turn on your pump, and open the ball valve. Instructions are right on the side. Mount in any convenient location.

**KITFLUSH** Flush Kit



## Conde Pump Repair Kits

Everything needed to repair your pump including: vanes, bearings, seals, shims, bearing covers, bearing cover screws and gaskets or o-rings.

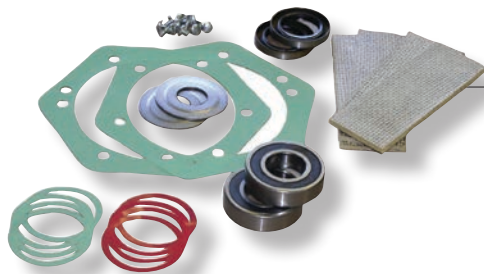

<b>KIT03VO</b>	Model 3 repair kit	<b>KIT12SSA</b>	Super 12 repair kit (eight vane)
<b>KIT03PV</b>	ProVac repair kit	<b>KIT06SDS</b>	SDS 6 kit (three vane)
<b>KIT06VO</b>	Model 6 repair kit	<b>KIT06SDSA</b>	SDS 6 kit (four vane)
<b>KIT06SS</b>	Super 6 repair kit (three vane)	<b>KIT12SDS</b>	SDS 12 kit (three vane)
<b>KIT06SSA</b>	Super 6 repair kit (four vane)	<b>KIT12SDSA</b>	SDS 12 kit (four vane)
<b>KIT12SS</b>	Super 12 repair kit (six vane)	<b>KIT12ULT</b>	SDS Ultra kit






# PUMP ACCESSORIES & PARTS

## Slide Valve Repair Kits

Slide Valve Repair Kits include piston cups, flapper, main gasket or o-rings and coupling gasket.

<b>SVKIT6</b>	Super 6
<b>SVKIT12</b>	Super 12
<b>SVKITSDS</b>	SDS
<b>SVKITPV</b>	ProVac 3

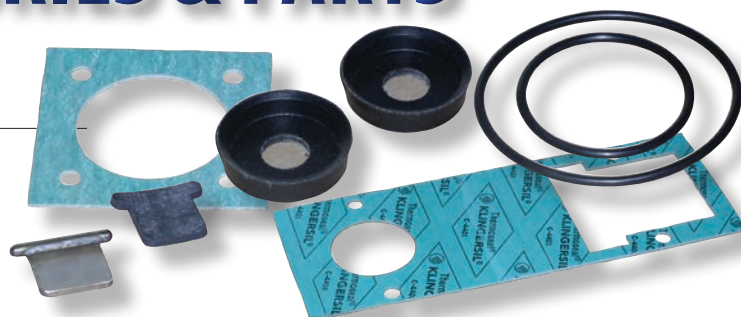

## Complete Plunger Valve Assembly

Plunger Rod Assembly

<b>SV001</b>	Super	<b>SV001PV</b>	ProVac
<b>SV001SDS</b>	SDS		



## Gauges

Regular vacuum and pressure gauges or high quality stainless steel liquid filled. Available in vacuum, pressure, or combination vacuum/pressure.

<b>GAGE020</b>	Vacuum regular	<b>GAGE011</b>	SS Pres Liq. Filled
<b>GAGE021</b>	Pressure regular	<b>GAGE016</b>	SS Vac/Pres Liq. Filled Back Conn.
<b>GAGE010</b>	SS Vac Liq. Filled	<b>GAGE012</b>	SS Vac/Pres Liq. Filled Bot. Conn.

## Removable Discharge

The Conde Removable Discharge makes cleaning plugged discharge openings easy. Unscrew eight bolts, and remove to reveal a six inch opening.

<b>LWRD01</b>	2" fitting	<b>LWRD02</b>	3" fitting
---------------	------------	---------------	------------



## Vacuum Hose

High quality steel reinforced hose for pump to tank air lines.

<b>HOSELWP100</b>	1"	<b>HOSELWP150</b>	1-1/2"
<b>HOSELWP114</b>	1-1/4"	<b>HOSELWP200</b>	2"



## Brass Swing Check Valve

Check valves hold vacuum in the tank when the vacuum pump is turned off.

<b>PFCV075</b>	3/4"	<b>PFCV125</b>	1-1/4"	<b>PFCV200</b>	2"
<b>PFCV100</b>	1"	<b>PFCV150</b>	1-1/2"		




## Electric Clutches - 12 Volt

<b>ELCL3049</b>	V - Belt
<b>ELCL3049PG</b>	Polygroove (6 Groove - Chevy)
<b>ELCL3049PG8</b>	Polygroove (8 Groove - Ford)



# BUILD YOUR OWN TANK KITS

## SDS 6 BUILD IT YOURSELF KIT

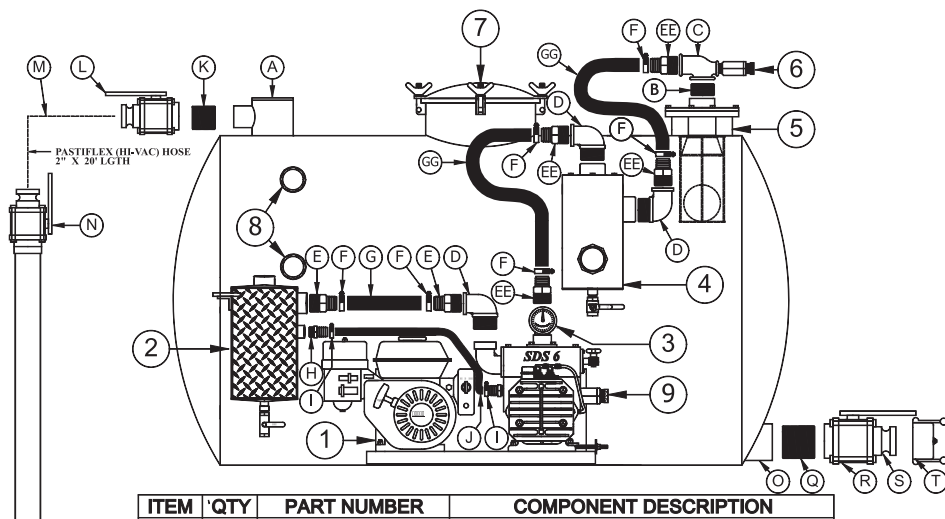

Conde Do-It-Yourself kits are complete packages that include everything you need to build your own liquid waste pumping unit. All you need to supply is the tank. Everything is included in our packages for installation on your tank including fittings and clamps. We have the right package for tanks from 100 to 2000 gallons using the most durable and best quality components on the market today.

The SDS 6 kit shown left is an example of what you will receive. Order now and save thousands of dollars.

ITEM	QTY	PART NUMBER	COMPONENT DESCRIPTION
1	1	HDUN06SDS09E	#6 SDS (VAC/PRESS) 9 HP HONDA EL. START
2	1	MFOC3612	ALUMINUM OIL CATCH MUFFLER
3	1	GAGE016	VAC./PRESS. GUAGE (CENTER BACK CONN.)
4	1	LWTRM01SS	1-1/2" STAINLESS STEEL SECONDARY TRAP
5	1	LWTRP02	1-1/2" STEEL PRIMARY TRAP
6	1	RVP13P	PRESSURE RELIEF VALVE
7	1	LWMN12	12" MANWAY
8	2	LWSG20	2" SIGHT GLASS ASSEMBLY
9	1	RVP13	VACUUM RELIEF VALVE

ITEM	QTY	PART NUMBER	PLUMBING / FITTING DESCRIPTION
A	1	LWIN200	2" INLET (ASSEMBLY)
B	1	PFNC150	1-1/2" CLOSE NIPPLE
C	1	PFTB150515	TEE 1-1/2" X 1" X 1-1/2"
D	3	PFECS150	1-1/2" GALV. ST. ELBOW
E	2	PFBH150150	HOSE BARB (1-1/2" NPT X 1-1/2" HOSE)
EE	4	PFBH150200	HOSE BARB (1-1/2" NPT X 2" HOSE)
F	6	CLAMP175	HOSE CLAMP (1-3/4" THRU 2-5/8")
G	4'	HOSELWP150	HOSE 1-1/2" I.D.
GG	8'	HOSELWP200	HOSE 2" I.D.
H	1	PFBH075075	HOSE BARB (3/4" NPT X 3/4" HOSE)
I	2	CLAMP016	HOSE CLAMP (13/16" thru 1-1/2")
J	4'	HOSELWP075	HOSE 3/4" I.D. (PRESSURE VENT)
K	1	PFNC200	2" CLOSE NIPPLE
L	1	LWVB200B	2" BALL VALVE W/ F ADAPTOR
M	1	LWHA20	2" X 20' HOSE ASSEMBLY W/ 2" PART C EA. END
N	1	LWWA20	2" WAND ASSEMBLY
O	1	PFCB300	3" BLK FULL COUPLING
Q	1	PFNC300	3" CLOSE NIPPLE
R	1	LWVB300	3" BALL VALVE
S	1	LWQDA300F	3" ALUMINUM (F) ADAPTOR
T	1	LWQDAC300	3" ALUMINUM DUST CAP

**Part No.**  
**PROVAC3-KIT**  
**SUPER-KIT**  
**SDS6-KIT**  
**SDS12-KIT**

**Description**  
 ProVac 3 kit complete w/5.5 Honda El. St.  
 Super 6 kit complete w/5.5 Honda El. St.  
 SDS 6 kit complete w/9.0 Honda El. St.  
 SDS 12 kit complete w/13.0 Honda El. St.

**Tank Size**  
 100 to 300 gallons  
 300 to 500 gallons  
 500 to 1000 gallons  
 1000 to 2000 gallons



## NOTES



## **Westmoor Ltd.**

**P.O. Box 99  
906 West Hamilton Ave.  
Sherrill, NY 13461  
USA**

**TOLL FREE 800-367-0972  
315-363-1500  
FAX 315-363-0193  
[pumps@westmoorltd.com](mailto:pumps@westmoorltd.com)**

***Accepting*  
MASTERCARD, VISA, AMEX AND DISCOVER**